



AQ290

The AQ290 uses Prolitec's patented AirQ technology to diffuse fragrance and odor canceling products into the air. This appliance was designed as an odor canceling solution for high-traffic, smaller spaces, has a slim, discrete profile and is available in a wall mount or free standing configuration.



One-touch, digital display is very easy to use.

50 intensity levels and timing options give you control.


Perfectly scents spaces up to 125m² (425m³).

AirQ™ droplets are 50 times smaller than traditional aerosol.



AQ290

Technical Specifications	Type	Single nebulizer head
	Cartridge	500 mL recyclable
	Droplet size	Typically less than one micron
Power Specifications	Input	100 – 240 VAC, 0.6 A, 50/60 Hz
	Protection	Switched-mode power supply
	Internal	3V backup battery
	Output	15V DCat 1.2A
Performance & Settings	Coverage	Up to 15,000 ft ³ (425 m ³)
	Programs	Up to 21 start/stop times and intensities 24/7 mode
	Settings	50 intensity levels
	Off-cycle	30 seconds, 2 minutes, or 7 minutes
	Enclosure	Polypropylene with locking door
	Safety Approval	UL, CE, & FCC Part 15, ROHS compliant
	Environment	0° to 40° C, <85% Humidity
Dimensions & Installation	Size	7½" x 10" x 3" (19.2 cm x 25.4 cm x 7.6 cm)
	Weight	5.2 lbs. (2.4kg) with full 500mL cartridge
	Mounting	Wall mount Tabletop, with stand
	Features	Integrated, adjustable fan Field replaceable pump SD card programming

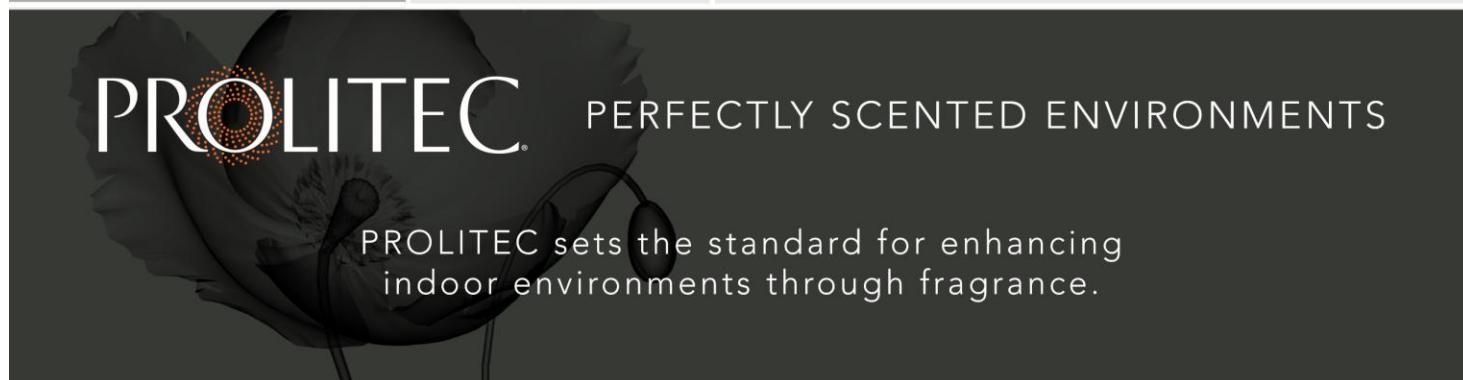

 **SECAIRDESIGN**